


PZKWR... Reinforced cover with Lock

Overview:

APPLICATION

Cable protection against damage.
Used in heavy dust indoor conditions.

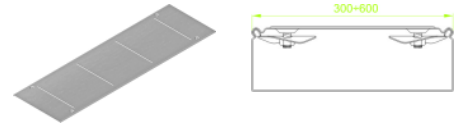

MATERIAL

Steel, strip-galv. acc. to the Sendzimir
to method PN-EN 10346:2011 (SG)
Available finishes:
F- steel, hot-dip galv to
PN-EN ISO 1461:2011 (HDG)
for 1mm thick min
E - stainless steel (SS), grade 1.4301 (AISI304)
for 1mm thick min
L- powder coating in a full range of colours (PC)

Versions:

Sheet thickness: **0,5 mm**

| Symbol | Length L [m] | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------------|--------------|--------------|------------------|-----------------|--------------|
| PZKWR300/2 | 2000 | 300 | 108630 | 4 | 1,25 |
| PZKWR300/3 | 3000 | 300 | 108730 | 4 | 1,25 |