


## KCP/KCOP...H60 Cable Tray

### Overview:

**APPLICATION**  
Cable routing

**MATERIAL**  
Steel, strip-galv. acc. to the  
Sendzimir method PN-EN 10346:2011  
Available finishes:  
L- powder coating in a full range of colours (PC)

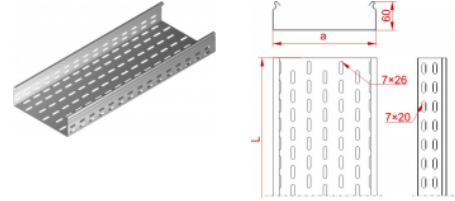

**Connecting cable trays only with connectors**

**Max. safe load: 20 kg/m**  
**Max. spacing of supports: 1.5m**

### Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCP/KCOP100H60/3	3000	100	161410	6	2,07
KCP/KCOP150H60/3	3000	150	161415	6	2,49
KCP/KCOP200H60/3	3000	200	161420	4	2,90
KCP/KCOP300H60/3	3000	300	161430	4	3,33
KCP/KCOP400H60/3	3000	400	160840	2	3,73
KCP/KCOP500H60/3	3000	500	160850	2	6,48
KCP/KCOP600H60/3	3000	600	160860	2	7,47