

KCP/KCOP...H60E Cable Tray

Overview:

APPLICATION

Cable routing

MATERIAL

Stainless steel, grade 1.4301 (AISI304)

Available finishes:


L- powder coating in a full range of colours (PC)

Connecting cable trays only with connectors

Max. safe load: 20 kg/m

Max. spacing of supports: 1.5m

Sheet thickness: **1,5 mm**

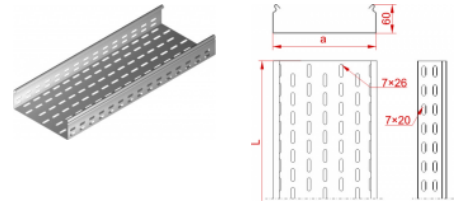

Versions:

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCP/KCOP100H60/ 3E	3000	100	861010	6	2,07
KCP/KCOP150H60/ 3E	3000	150	861015	6	2,49
KCP/KCOP200H60/ 3E	3000	200	861020	4	2,90
KCP/KCOP300H60/ 3E	3000	300	861030	4	3,33
KCP/KCOP400H60/ 3E	3000	400	861040	2	3,73
KCP/KCOP500H60/ 3E	3000	500	861050	2	6,48
KCP/KCOP600H60/ 3E	3000	600	861060	2	7,47