

KCL/KCOL...H60F Cable Tray


Overview:

APPLICATION

Cable routing

MATERIAL

Steel, hot-dip galvanised
to PN-EN ISO 1461:2011 (HDG)
Available finishes:
L- powder coating in a full range of colours (PC)

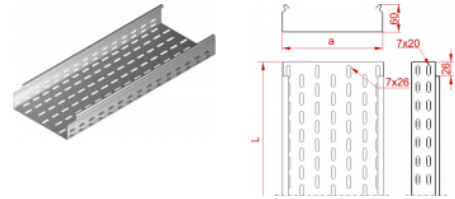

Connecting cable trays by sliding-in and screwing together

Max. safe load: 20 kg/m

Max. spacing of supports: 1.5m

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCL/KCOL150H60/3F	3000	150	169516	6	1,43
KCL/KCOL200H60/3F	3000	200	169521	6	1,68
KCL/KCOL300H60/3F	3000	300	169531	4	2,18