

## KCD/KCOD...H60F Cable Tray


### Overview:

**APPLICATION**

Cable routing

**MATERIAL**

Steel, hot-dip galvanised  
to PN-EN ISO 1461:2011 (HDG)  
Available finishes:  
L- powder coating in a full range of colours (PC)

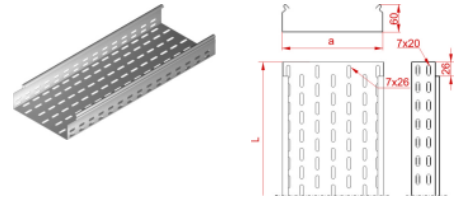

**Connecting cable trays by sliding-in and screwing together**

**Max. safe load: 20 kg/m**

**Max. spacing of supports: 1.5m**

### Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
<b>KCD/KCOD100H60/3F</b>	<b>3000</b>	<b>100</b>	<b>169111</b>	<b>6</b>	<b>2,07</b>
<b>KCD/KCOD150H60/3F</b>	<b>3000</b>	<b>150</b>	<b>169114</b>	<b>6</b>	<b>2,49</b>
<b>KCD/KCOD200H60/3F</b>	<b>3000</b>	<b>200</b>	<b>169121</b>	<b>4</b>	<b>2,90</b>
<b>KCD/KCOD300H60/3F</b>	<b>3000</b>	<b>300</b>	<b>169131</b>	<b>4</b>	<b>3,33</b>
<b>KCD/KCOD400H60/3F</b>	<b>3000</b>	<b>400</b>	<b>169141</b>	<b>2</b>	<b>3,73</b>