

## LPDWP/LPDWOP...H60 90° Vertical Bend - Internal


### Overview:

**APPLICATION**

Diversion in cable routing.

**MATERIAL**

Steel, strip-galv. acc. to the  
Sendzimir method PN-EN 10346:2011  
Available finishes:  
F - steel, hot-dip galvanised  
to PN-EN ISO 1461:2011 (HDG)  
E - stainless steel, grade 1.4301 (AISI304)  
L - powder coating in a full range of colours (PC)

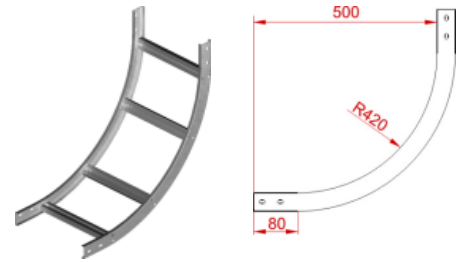

**For assembly use 4 pcs of Straight connectors  
LDC/LDOCH60  
and 16 sets of screw SGK8x14**

### Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDWP/LPDWOP200H60	200	469220	1	2,26
LPDWP/LPDWOP300H60	300	469230	1	2,66
LPDWP/LPDWOP400H60	400	469240	1	3,02
LPDWP/LPDWOP500H60	500	469250	1	3,42