


## KDS/KDSO...H60E Wire Mesh Cable Tray

### Overview:

**APPLICATION**  
Cable routing.

**MATERIAL**  
Hot dip galvanised wire  
to PN-EN ISO 1461:2011 (HDG)  
Available finishes:  
L - powder coating in a full range of colours (PC)

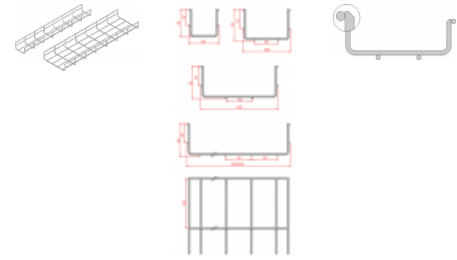

**Max. safe load**  
**KDS/KDSO60H60/3: 2 kg/m**  
**KDS/KDSO100 - 600H60/3: 20 kg/m**  
**Max. spacing of supports: 1.5m**

### Versions:

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box
KDS/KDSO60H60/3E	3000	60	960101	8
KDS/KDSO100H60/3E	3000	100	960102	8
KDS/KDSO150H60/3E	3000	150	960103	8
KDS/KDSO200H60/3E	3000	200	960104	8
KDS/KDSO300H60/3E	3000	300	960105	4
KDS/KDSO400H60/3E	3000	400	960106	2
KDS/KDSO500H60/3E	3000	500	960107	2
KDS/KDSO600H60/3E	3000	600	960108	2