

KLL75H60L Painted Cable Tray

Overview:

APPLICATIONS

Installation of light systems.


MATERIAL

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Powder coated only on outside to RAL9010

On request:

powder painting in standard RAL color (info page 2)

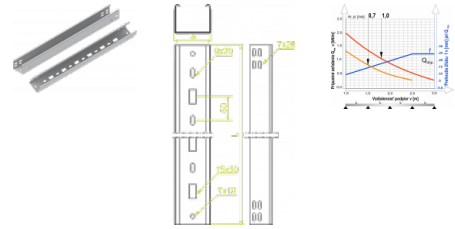

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
KLL75H60/3L	3000	75	160507	4	60	1,12
KLL75H60/6L	6000	75	163007	4	60	1,12