

KKLJH60 90° Horizontal Bend

Overview:

APPLICATIONS

Diversions in cable routing.

MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F - steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304),

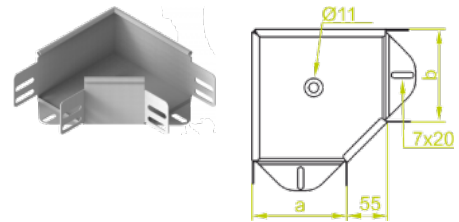

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKLJ75H60	75	160607	20	0,32
KKLJ120H60	120	163412	20	0,46