

CMP41H21...F Support Channel

Overview:

Application

Used for suspending lighting, as part of the assembly, and as construction element for installing cable trays, ladders, and Brackets **WW**, **WWS/WWSO**, **WWC**, **WWCN**, **WMC/WMCO**, **WMCN**, **WPL**, **WWD**, **WPT**, **WTL**, **WWT**.

Material


Steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

Available to order:

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

E- stainless steel, lengths up to 3 m, addition CMC41H21, CMM41H21 and CMT41H21 (SS)

L- powder coating in a full range of colours (PC)

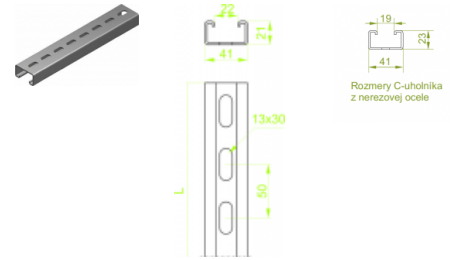

Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CMP41H21/02F	200	41	620112	50	21	0,23
CMP41H21/03F	300	41	620113	50	21	0,35
CMP41H21/04F	400	41	620114	30	21	0,47
CMP41H21/05F	500	41	620115	30	21	0,59
CMP41H21/06F	600	41	620106	30	21	0,70
CMP41H21/07F	700	41	620107	30	21	0,82
CMP41H21/08F	800	41	620108	8	21	0,94
CMP41H21/09F	900	41	620109	8	21	1,06
CMP41H21/1F	1000	41	620111	8	21	1,17
CMP41H21/2F	2000	41	620122	8	21	2,34
CMP41H21/3F	3000	41	620132	8	21	3,51
CMP41H21/6F	6000	41	620160	8	21	7,02