

## CMC41H21...F Support Channel

### Overview:

#### Application

Used for suspending lighting, as part of the assembly, and as construction element for installing cable trays, ladders, and Brackets **WW**, **WWS/WWSO**, **WWC**, **WWCN**, **WMC/WMCO**, **WMCN**, **WPL**, **WWD**, **WPT**, **WTL**, **WWT**.

#### Material


Steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

#### Available to order:

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**E**- stainless steel, lengths up to 3 m, addition CMC41H21, CMM41H21 and CMT41H21 (SS)

**L**- powder coating in a full range of colours (PC)

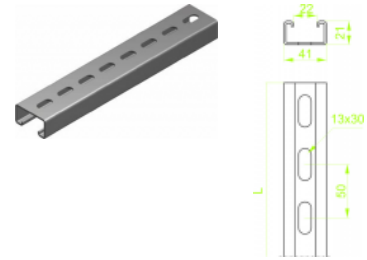

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CMC41H21/02F	200	41	620212	50	21	0,31
CMC41H21/03F	300	41	620213	50	21	0,47
CMC41H21/04F	400	41	620214	30	21	0,62
CMC41H21/05F	500	41	620215	30	21	0,78
CMC41H21/06F	600	41	620206	30	21	0,94
CMC41H21/07F	700	41	620207	8	21	1,09
CMC41H21/08F	800	41	620208	8	21	1,24
CMC41H21/09F	900	41	620209	8	21	1,40
CMC41H21/1F	1000	41	620211	8	21	1,56
CMC41H21/2F	2000	41	620222	8	21	3,12
CMC41H21/3F	3000	41	620232	8	21	4,68
CMC41H21/6F	6000	41	620260	8	21	9,36