

## CMPC41H42...F Dual Support Channel

### Overview:

#### Application

Used for suspending lighting, as part of the assembly, and as construction element for installing cable trays, ladders, and Brackets **WW**, **WWS/WWSO**, **WWC**, **WWCN**, **WMC/WMCO**, **WMCN**, **WPL**, **WWD**, **WPT**, **WTL**, **WWT**.

#### Material


Steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

#### Available to order:

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**E**- stainless steel, lengths up to 3 m, addition CMC41H21, CMM41H21 and CMT41H21 (SS)

**L**- powder coating in a full range of colours (PC)

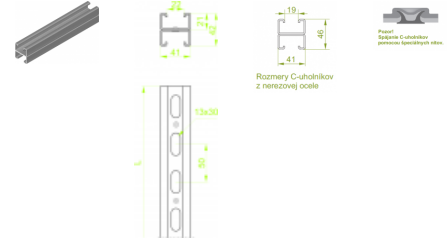

#### Note!

Standard rivet spacing of 200 mm

Possibility to order any lengths up to 6 m.

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CMPC41H42/3F	3000	41	617002	8	42	9,36
CMPC41H42/6F	6000	41	617003	4	42	18,72