

KKJ...H80 90° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

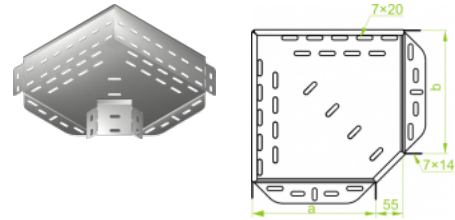


**For installation use Screw Sets SGK M6×12 or SG M6×12.
In case of special orders please specify dimensions a and b.**

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-----------|--------------|------------------|-----------------|--------------|
| KKJ100H80 | 100 | 182110 | 2 | 0,48 |
| KKJ150H80 | 150 | 182115 | 2 | 0,62 |
| KKJ200H80 | 200 | 182120 | 2 | 0,90 |
| KKJ300H80 | 300 | 182130 | 2 | 1,60 |
| KKJ400H80 | 400 | 182140 | 2 | 2,30 |
| KKJ500H80 | 500 | 182150 | 2 | 3,06 |
| KKJ600H80 | 600 | 182160 | 2 | 4,06 |

Connected products:

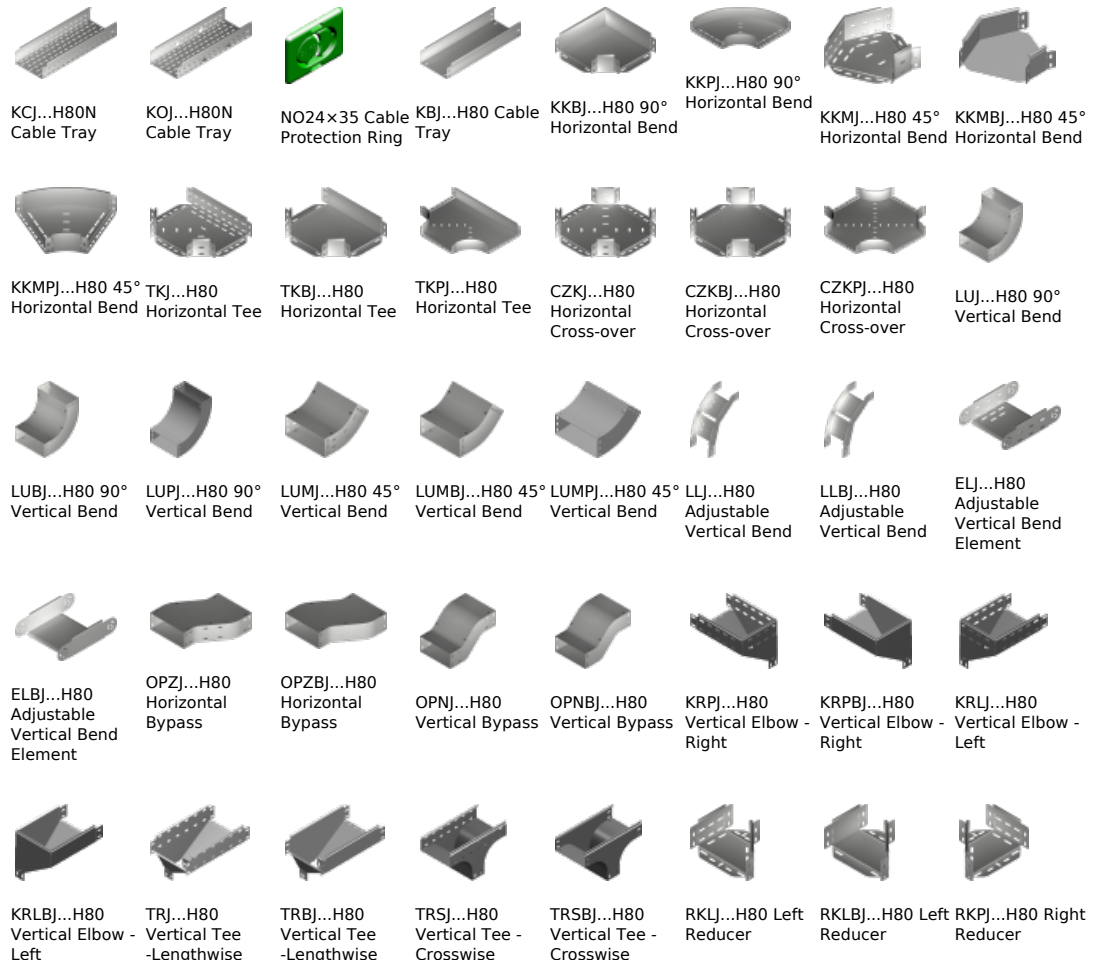

RKPBJ...H80
Right ReducerRKSJ...H80
Straight
ReducerRKSBJ...H80
Straight
ReducerLRJH80 Corner
ConnectorLRBJH80 Corner
ConnectorTKDJ...H80
Add-on TeeLRPJH80 Corner
Connector