

KKJ...H80 90° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

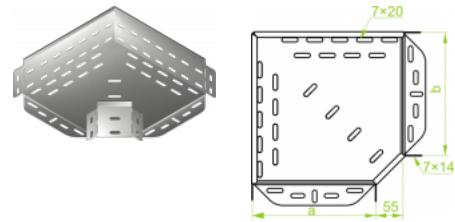


**For installation use Screw Sets SGK M6x12 or SG M6x12.
In case of special orders please specify dimensions a and b.**

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKJ100H80	100	182110	2	0,48
KKJ150H80	150	182115	2	0,62
KKJ200H80	200	182120	2	0,90
KKJ300H80	300	182130	2	1,60
KKJ400H80	400	182140	2	2,30
KKJ500H80	500	182150	2	3,06
KKJ600H80	600	182160	2	4,06

Connected products:

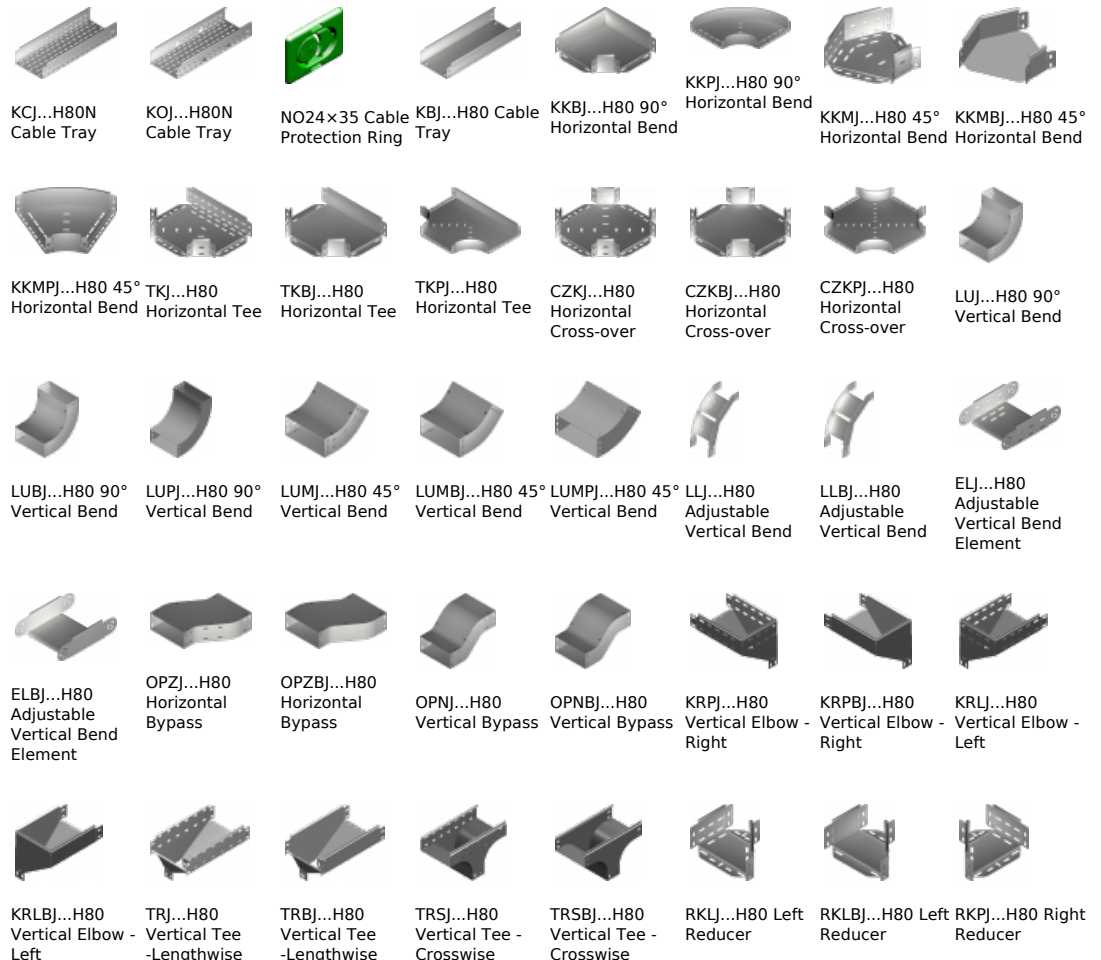

RKPBJ...H80
Right ReducerRKSJ...H80
Straight
ReducerRKSBJ...H80
Straight
ReducerLRJH80 Corner
ConnectorLRBJH80 Corner
ConnectorTKDJ...H80
Add-on TeeLRPJH80 Corner
Connector