

## CMPC41H82...F Dual Support Channel

### Overview:

#### Application

Used for suspending lighting, as part of the assembly, and as construction element for installing cable trays, ladders, and Brackets **WWT**, **WPT**, **WWC**, **WWCN**, **WPL**, **WTL**, **WW**, **WWS/WWSO**, **WWD**, **WMC/WMCO**, **WMCN**.

#### Material

Steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

#### Available to order:


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**E**- stainless steel, lengths up to 3 m, addition CMC41H41, CMM41H41 i CMT41H41 (SS)  
**L**- powder coating in a full range of colours (PC)

#### Note!

Standard rivet spacing of 200 mm

Possibility to order any lengths up to 6 m.

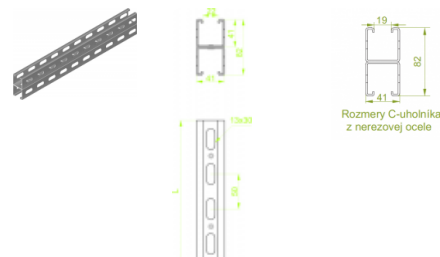

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CMPC41H82/3F	3000	41	617008	8	82	9,36
CMPC41H82/6F	6000	41	617009	4	82	18,72