


KKMP...H80 45° Horizontal Bend

Overview:

Application
Diversion in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

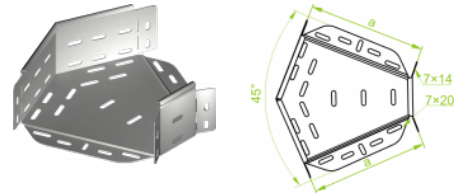


For installation use Screw Sets SGK M6×12 or SG M6×12.

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMP100H80	100	182410	10	0,48
KKMP150H80	150	182415	10	0,66
KKMP200H80	200	182420	10	0,94
KKMP300H80	300	182430	4	1,61
KKMP400H80	400	182440	4	2,41
KKMP500H80	500	182450	2	3,19
KKMP600H80	600	182460	2	4,26

Connected products:

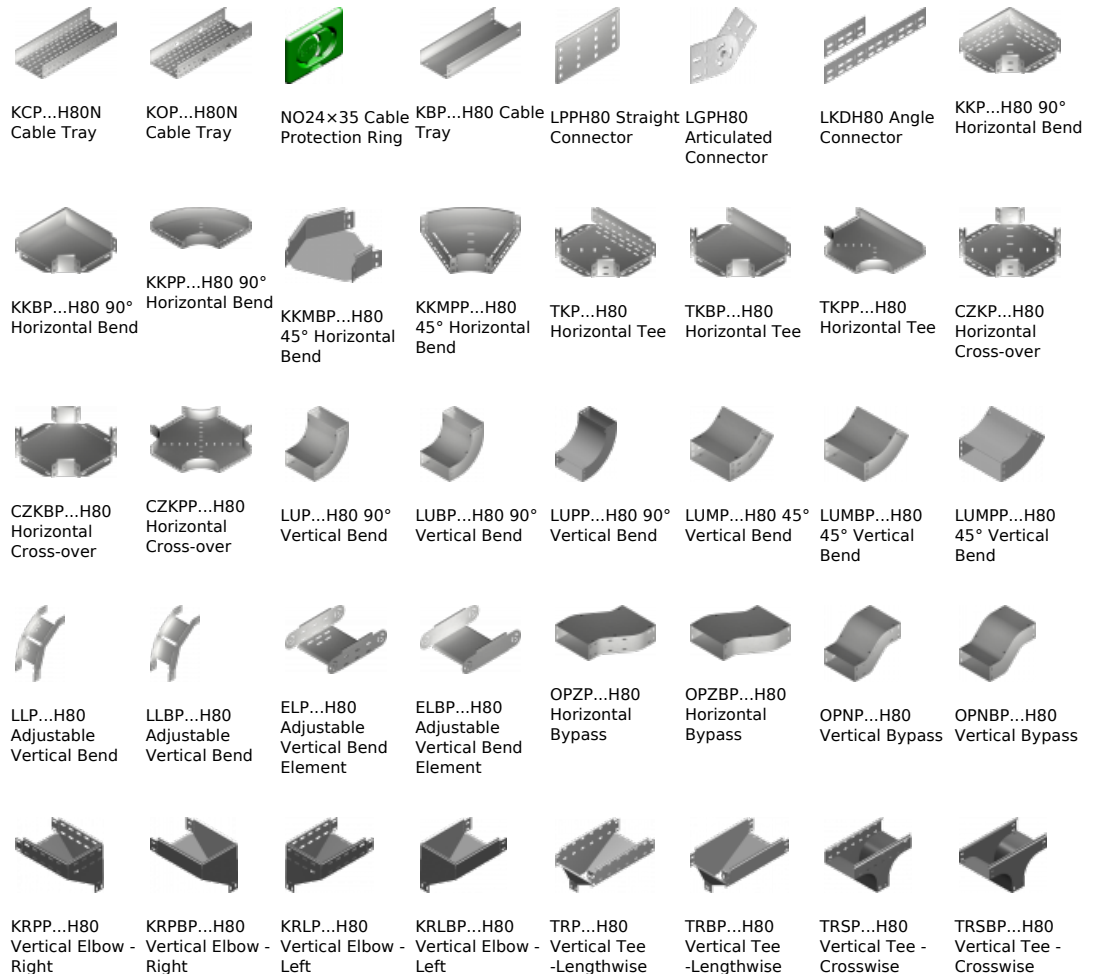

RKL...H80 Left
ReducerRKLBP...H80 Left
ReducerRKPP...H80
Right ReducerRKPBP...H80
Right ReducerRKSP...H80
Straight
ReducerRKSBP...H80
Straight
ReducerTKDP...H80
Add-on TeeLRPPH80 Corner
Connector