

LUMP...H80 45° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

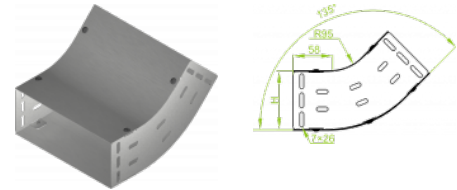

For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling





Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMP100H80	100	183210	10	1,44
LUMP150H80	150	183215	10	1,80
LUMP200H80	200	183220	4	2,17
LUMP300H80	300	183230	4	2,90
LUMP400H80	400	183240	2	3,63
LUMP500H80	500	183250	2	4,33
LUMP600H80	600	183260	2	5,07

Connected products:



Right	Right	Left	Left	-Lengthwise	-Lengthwise	Crosswise	Crosswise
							
RKLP...H80 Left Reducer	RKLBP...H80 Left Reducer	RKPP...H80 Right Reducer	RKPBP...H80 Right Reducer	RKSP...H80 Straight Reducer	RKSBP...H80 Straight Reducer	TKDP...H80 Add-on Tee	LRPPH80 Corner Connector