


KRJN Cable Tray

Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
L- powder coating in a full range of colours (PC)

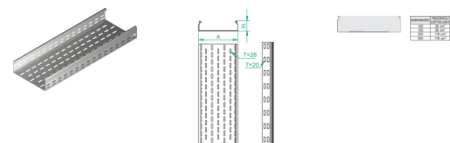

IMPORTANT! Available when ordering in large quantity are
2m
long tray sections. For the installation use Snap-In
Connector LZL...
or Snap-In Connector Set LSL... with screw sets SGK M6x12
or SG M6x12.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KRJ100H60/3	3000	100	161706	6	1,60	5800
KRJ100H60/6	6000	100	161806	4	1,60	5800
KRJ150H60/3	3000	150	162006	6	1,92	8800
KRJ150H60/6	6000	150	162106	4	1,92	8800
KRJ200H60/3	3000	200	162306	6	2,24	11800
KRJ200H60/6	6000	200	162406	4	2,24	11800
KRJ300H60/3	3000	300	162307	6	2,96	17800
KRJ300H60/6	6000	300	162407	4	2,96	17800