

POLZZC Cover For Horizontal Bypass - Left H50, H100

Overview:

APPLICATION

Protecting cables against damage. Tight cover protection against accumulation of dirt and dust.

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)


Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

Note:

In every cover are pre-punched holes, necessary for dipping-in melted zinc (ref. hot-dip galvanizing process)

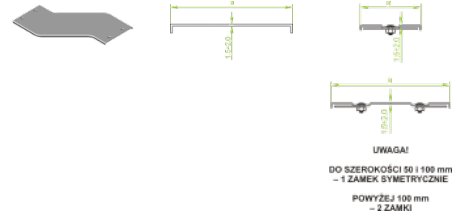

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|------------------|--------------|------------------|-----------------|--------------|
| POLZZC 50 | 50 | 316005 | 20 | 0,34 |
| POLZZC100 | 100 | 316010 | 20 | 0,67 |
| POLZZC200 | 200 | 316020 | 10 | 1,21 |
| POLZZC300 | 300 | 316030 | 10 | 1,74 |
| POLZZC400 | 400 | 316040 | 4 | 2,27 |
| POLZZC500 | 500 | 316050 | 4 | 2,80 |
| POLZZC600 | 600 | 316060 | 4 | 3,33 |