

LLBL...H30 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

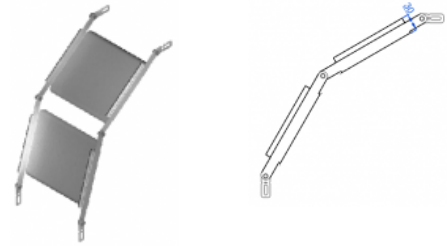

For installation use Screw Sets SGK M6×10 or SG M6×10.

Adjustable Vertical Bend is delivered fully assembled

together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors

6 sets of screws

Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLBL50H30	50	136005	2	0,45
LLBL100H30	100	136010	2	0,57
LLBL150H30	150	136015	2	0,65
LLBL200H30	200	136020	2	0,83
LLBL300H30	300	136030	2	1,07

Connected products:

