

WWB Wyсіęgnik


Overview:

APPLICATIONS

Supporting cable trays.
Suitable for mounting on a support WPCB ...

MATERIAL

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)
Available to order:
F- steel, hot-dip galv.
to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC)

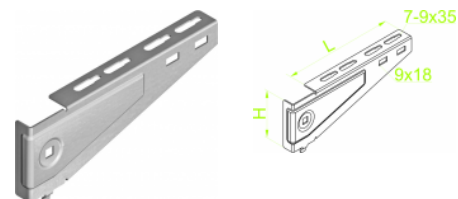

Launch of production in the first quarter of 2015.

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WWB100	115	711710	10	80	0,20	1,20
WWB200	215	711720	10	90	0,40	1,40
WWB300	315	711730	10	115	0,75	1,90
WWB400	415	711740	10	115	1,20	1,80