

KKS...H60 90° Horizontal Bend


Overview:

APPLICATION

Diversion in cable routing

MATERIAL

Steel, strip-galv. acc. to the
Sendzimir method PN-EN 10346:2011
Available finishes:
F- steel, hot-dip galvanised
to PN-EN ISO 1461:2011 (HDG)
E - stainless steel, grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC)

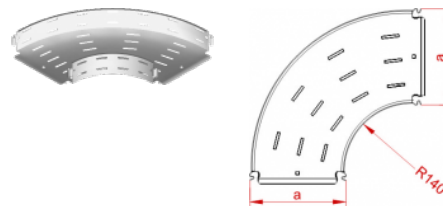

For the assembly use additional 4 set USKS and 2 sets ZS/ZSO

Benefits:

Faster assembly of cable routes thanks to the integrated connector for fittings.