

KKMPP...H80 45° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

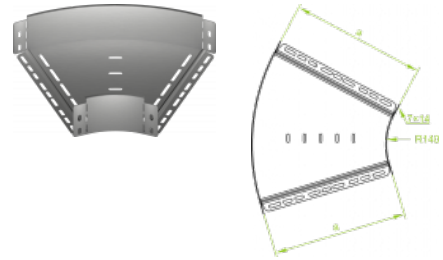


For installation use Screw Sets SGK M6×12 or SG M6×12.

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMPP100H80	100	182214	16	0,61
KKMPP150H80	150	182314	10	0,79
KKMPP200H80	200	182414	10	1,00
KKMPP300H80	300	182514	4	1,49
KKMPP400H80	400	182614	4	2,08
KKMPP500H80	500	182714	2	2,75
KKMPP600H80	600	182814	2	3,52

Connected products:

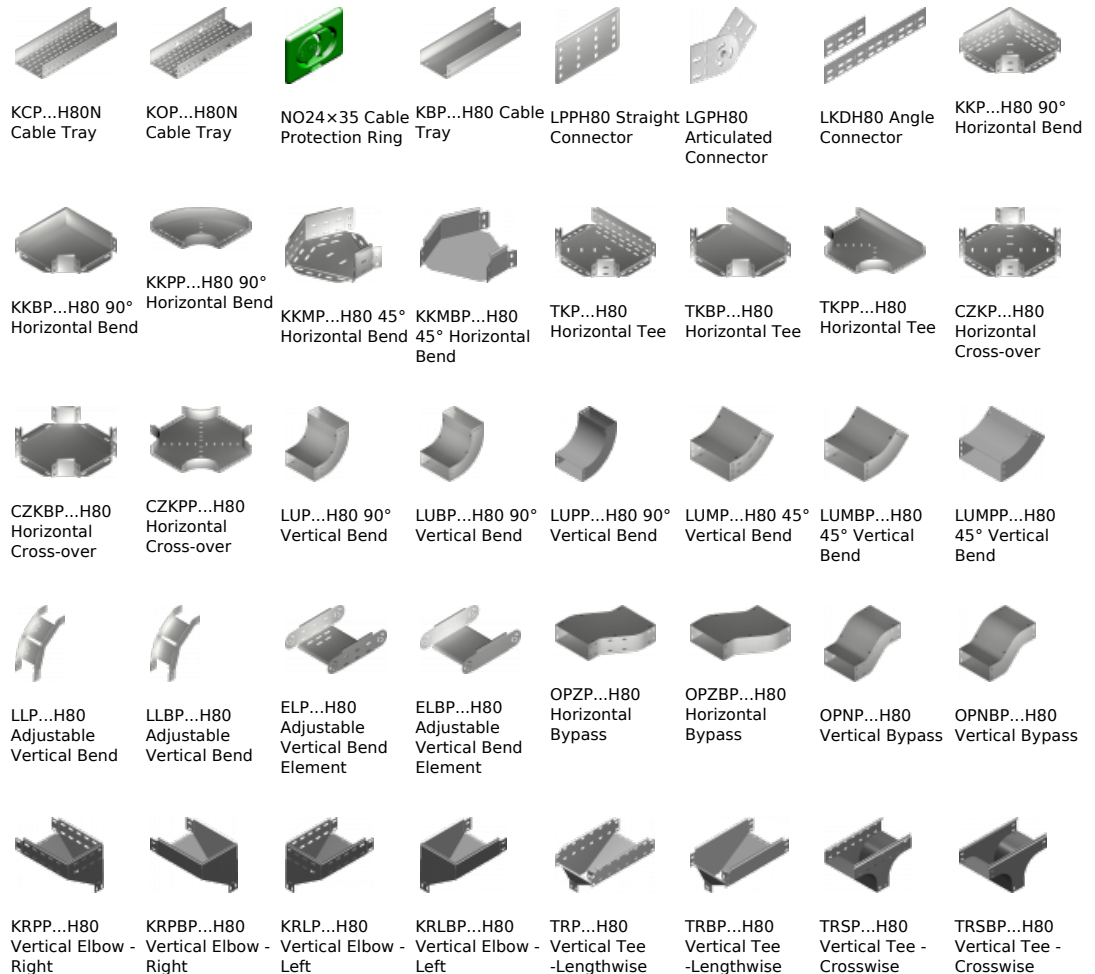

RKLP...H80 Left
ReducerRKLBP...H80 Left
ReducerRKPP...H80
Right ReducerRKPBP...H80
Right ReducerRKSP...H80
Straight
ReducerRKSBP...H80
Straight
ReducerTKDP...H80
Add-on TeeLRPPH80 Corner
Connector