

KCJ..H100N Cable Tray

Overview:


Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Important! Possibility of joining cable tray sections together through sliding one into another and connectorfree assembly.

Available when ordering in large quantity are 2m and 6m long tray sections. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.

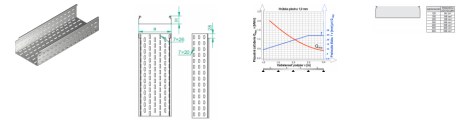


Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KCJ100H100/3N	3000	100	110410	4	1,56	9800
KCJ150H100/3N	3000	150	110415	4	1,83	14800
KCJ200H100/3N	3000	200	110420	4	2,08	19800
KCJ300H100/3N	3000	300	110430	2	2,57	29800
KCJ400H100/3N	3000	400	110440	2	3,07	39800
KCJ500H100/3N	3000	500	110450	2	3,57	49800
KCJ600H100/3N	3000	600	110460	2	4,07	59800

Connected products:

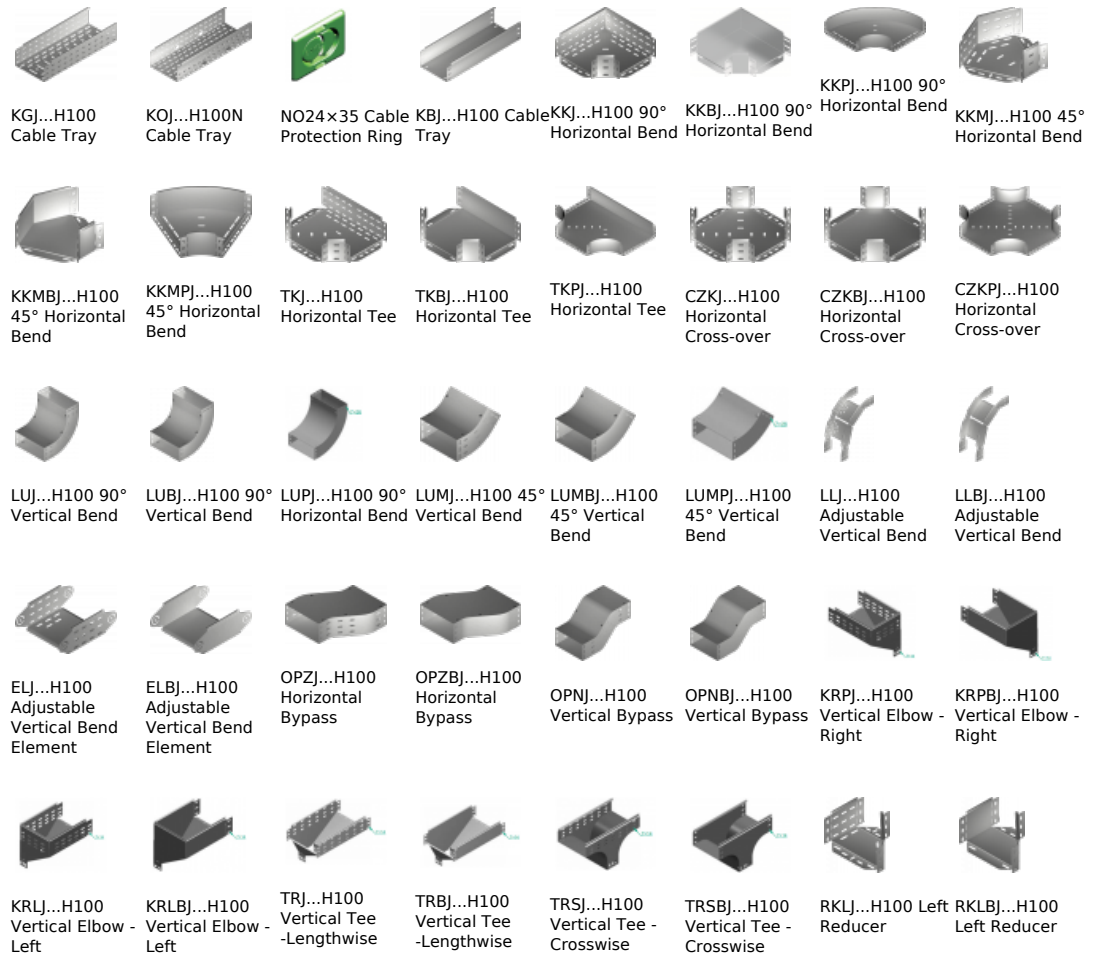

RKPJ...H100
Right ReducerRKPBJ...H100
Right ReducerRKSJ...H100
Straight
ReducerRKSBJ...H100
Straight
ReducerLRJH100 Corner
ConnectorLRBJH100
Corner
ConnectorTKDJ...H100
Add-on TeeLRPJH100
Corner
Connector