

## LDOZ...H30 Oblúk rebríka 90°

### Overview:

#### POUŽITIE

Zmena smeru vedenia káblovej trasy.

#### MATERIAL


Oceľ žiarovo -lamelovo zinkovaná podľa EN ISO 10683:2014-09

Na objednávku.

Nerezová oceľ EN 10088

Poznámka:

- K montáži použite spojky LDOUH30 a skrutky SGKFM8x16

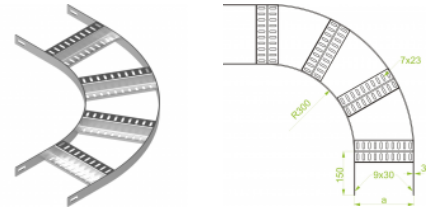

### Versions:

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDOZ100H30	106	403110	1	1,88
LDOZ200H30	206	403120	1	2,63
LDOZ300H30	306	403130	1	3,42
LDOZ400H30	406	403140	1	4,21
LDOZ500H30	506	403150	1	5,84
LDOZ600H30	606	403160	1	6,75
LDOZ700H30	706	403170	1	7,81
LDOZ800H30	806	403180	1	8,77
LDOZ900H30	906	403190	1	9,73
LDOZ1000H30	1006	403111	1	10,59