


KKJ...H100 90° Horizontal Bend

Overview:

Application
Diversion in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

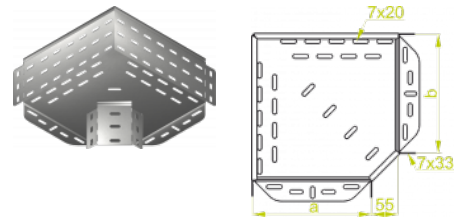


For installation use Screw Sets SGK M6×12 or SG M6×12.
In case of special orders please specify dimensions a and b.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKJ100H100	100	112110	10	0,53
KKJ150H100	150	112115	10	0,70
KKJ200H100	200	112120	10	1,02
KKJ300H100	300	112130	4	1,76
KKJ400H100	400	112140	4	2,53
KKJ500H100	500	112150	2	3,26
KKJ600H100	600	112160	2	4,33

Connected products:

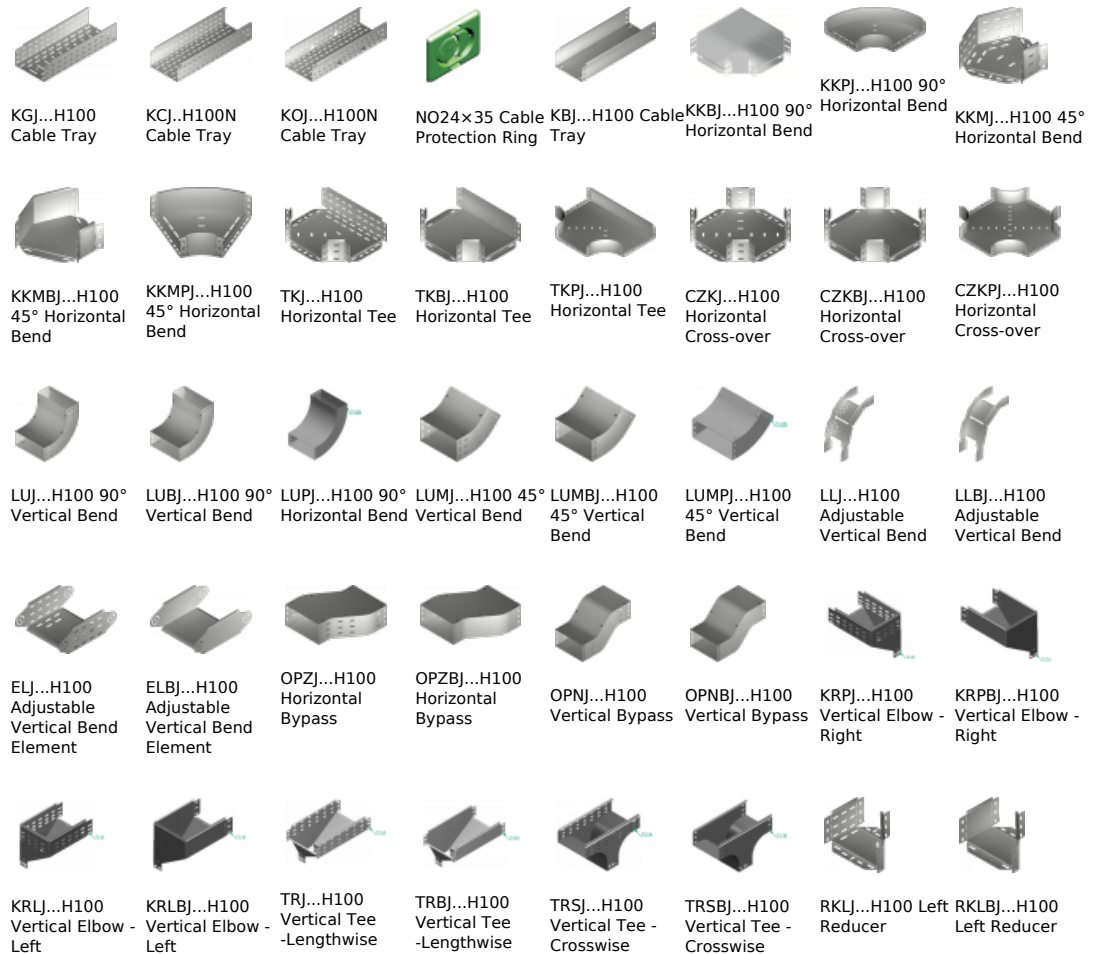

RKPJ...H100
Right ReducerRKPBJ...H100
Right ReducerRKSJ...H100
Straight
ReducerRKSBJ...H100
Straight
ReducerLRJH100 Corner
ConnectorLRBJH100
Corner
ConnectorTKDJ...H100
Add-on TeeLRPJH100
Corner
Connector