

LUMP...H100 45° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

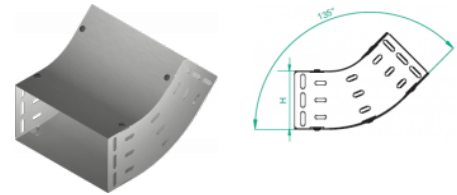


For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMP100H100	100	113210	10	1,61
LUMP150H100	150	113215	10	1,97
LUMP200H100	200	113220	4	2,34
LUMP300H100	300	113230	4	3,07
LUMP400H100	400	113240	2	3,80
LUMP500H100	500	113250	2	4,50
LUMP600H100	600	113260	2	5,24

Connected products:

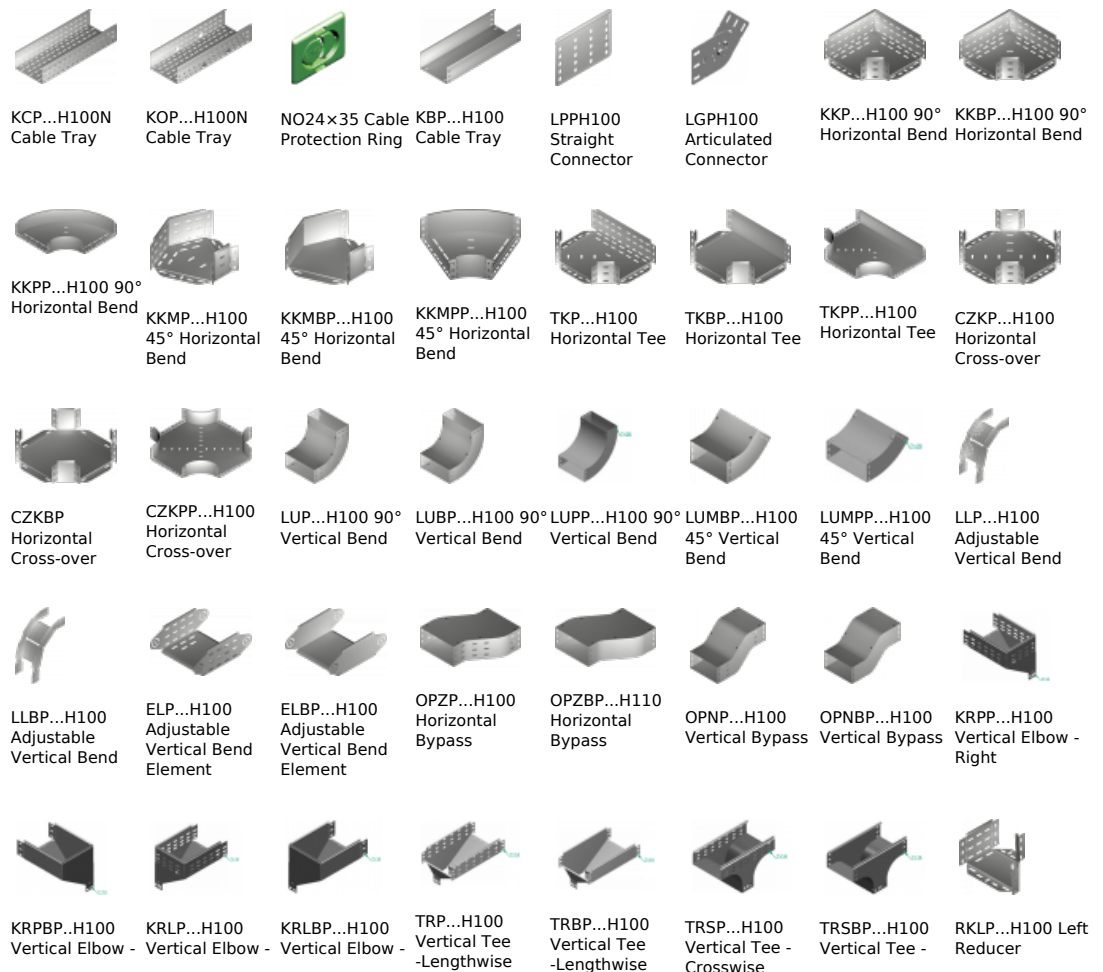

Right

RKLBP...H100
Left Reducer

Left

RKPP...H100
Right Reducer

Left

RKPBP...H100
Right ReducerRKSP...H100
Straight
ReducerRKSBP...H100
Straight
ReducerTKDP...H100
Add-on Tee

Crosswise

LRPPH100
Corner
Connector