

PZKP... Cover

Overview:

Application

Protecting cables against damage. Used in heavy dust indoor conditions

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG) for 1mm thick min

E- stainless steel (SS) to 1.2mm thick max.

L- powder coating in a full range of colours (PC)

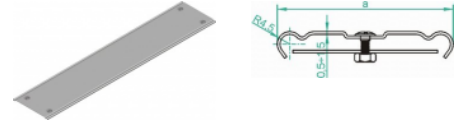

Cover with a lock

Important! Made to order covers are 2m long. Covers PKP and PZKP

are not manufactured from stainless steel (SS).

NOTE:

**Up to 100mm WIDE - 1 LOCK - SYMMETRICALLY
OVER 100mm WIDE - 2 LOCKS**

Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PZKP50/3	3000	50	102205	6	0,94
PZKP100/3	3000	100	102210	6	1,54
PZKP150/3	3000	150	102215	6	2,14
PZKP200/3	3000	200	102220	4	2,74
PZKP300/3	3000	300	102230	4	3,94
PZKP400/3	3000	400	101840	4	5,14
PZKP500/3	3000	500	101850	2	6,34
PZKP600/3	3000	600	101860	2	7,54

Connected products:

