

PZKR... Cover

Overview:

Application

Protecting cables against damage. Used in heavy dust indoor conditions

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG) for 1mm thick min

E- stainless steel (SS) to 1.2mm thick max.

L- powder coating in a full range of colours (PC)

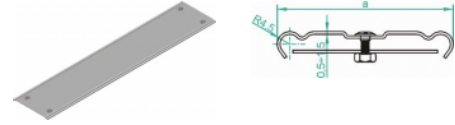

Cover with a lock

Important! Made to order covers are 2m long. Covers PKP and PZKP

are not manufactured from stainless steel (SS).

NOTE:

Up to 100mm WIDE - 1 LOCK - SYMMETRICALLY
OVER 100mm WIDE - 2 LOCKS

Versions:

Sheet thickness: **0,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PZKR50/2	2000	50	101305	20	0,36
PZKR 50/3	3000	50	101405	20	0,36
PZKR100/2	2000	100	101310	10	0,59
PZKR100/3	3000	100	101410	10	0,59
PZKR150/2	2000	150	101315	6	0,81
PZKR150/3	3000	150	101415	6	0,81
PZKR200/2	2000	200	101320	6	0,99
PZKR200/3	3000	200	101420	6	0,99
PZKR300/2	2000	300	101330	4	1,49
PZKR300/3	3000	300	101430	4	1,49

Connected products:

