


LUMFWJ...H60 Oblúk žľabu vnútorný 45° KLIK

Overview:

Použitie:
Zmena smeru vedenia káblovej trasy KLIK. Beskrutková montáž.

Materiál:
Oceľ zinkovaná metódou Sendzimira EN 10346:2015-09,

Na objednávku:
L - lakovanie v štandardnej farbe RAL.

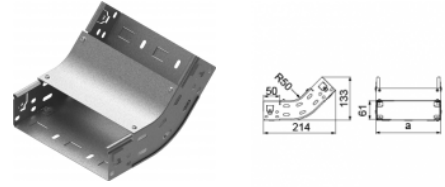

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMFWJ50H60	50	164460	1	0,41
LUMFWJ100H60	100	164461	1	0,55
LUMFWJ150H60	150	164462	1	0,69
LUMFWJ200H60	200	164463	1	0,83
LUMFWJ300H60	300	164464	1	1,12
LUMFWJ400H60	400	164465	1	1,41
LUMFWJ500H60	500	164466	1	1,70
LUMFWJ600H60	600	164467	1	1,98