


LUMFZJ...H60 Oblúk žľabu vonkajší 45° KLIK

Overview:

Použitie:
Zmena smeru vedenia káblovej trasy KLIK. Bezskrutková montáž.

Materiál:
Oceľ zinkovaná metódou Sendzimira EN 10346:2015-09,

Na objednávku:
L - lakovanie v štandardnej farbe RAL.

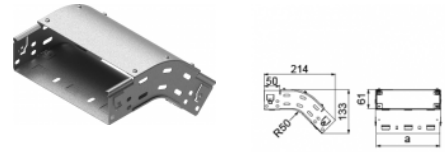

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMFZJ50H60	50	136468	1	0,41
LUMFZJ100H60	100	136469	1	0,55
LUMFZJ150H60	150	136470	1	0,69
LUMFZJ200H60	200	136471	1	0,83
LUMFZJ300H60	300	136472	1	1,12
LUMFZJ400H60	400	136473	1	1,41
LUMFZJ500H60	500	136474	1	1,70
LUMFZJ600H60	600	136475	1	1,98