

PRKSL... Cover For Straight Reducer

Overview:

Application

Protecting cables against damage. Used in heavy dust indoor conditions.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

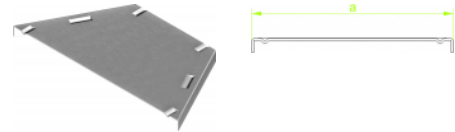

NOTE: To attach covers without locks to non-perforated fittings

use Clamp ZPD. With perforated fittings Clamp ZPNH... should be applied

IMPORTANT! Covers with locks for fittings available to order

Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
PRKSL100/50	100	104410	10	0,07	50
PRKSL150/100	150	104415	10	0,10	100
PRKSL200/100	200	104420	10	0,11	100
PRKSL200/150	200	104520	10	0,13	150
PRKSL300/200	300	104430	10	0,17	200
PRKSL400/300	400	104440	10	0,22	300
PRKSL500/400	500	104450	10	0,28	400
PRKSL600/500	600	104460	10	0,33	500

Connected products:

