

LWKSC...H100N 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

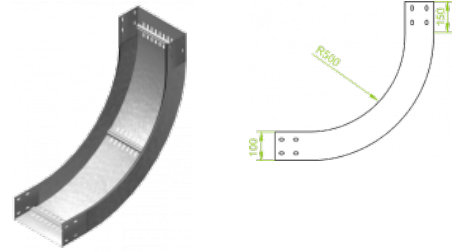

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|---------------|--------------|------------------|-----------------|--------------|
| LWKSC200H100N | 200 | 221122 | 2 | 7,03 |
| LWKSC300H100N | 300 | 221132 | 2 | 8,04 |
| LWKSC400H100N | 400 | 221142 | 2 | 9,02 |
| LWKSC500H100N | 500 | 221152 | 2 | 10,13 |
| LWKSC600H100N | 600 | 221162 | 2 | 11,27 |