

## LZKSC...H100N 90° Vertical Bend - External

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)


**L-** powder coating in a full range of colours (PC)

**For joining fittings to cable tray use Straight Connectors for Fittings**

**LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.**

**FEATURES & BENEFITS:**

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

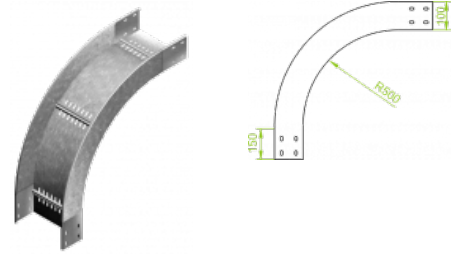

### Versions:

Sheet thickness: **2,0 mm**

| Symbol        | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|---------------|--------------|------------------|-----------------|--------------|
| LZKSC200H100N | 200          | 221222           | 2               | 7,03         |
| LZKSC300H100N | 300          | 221232           | 2               | 8,04         |
| LZKSC400H100N | 400          | 221242           | 2               | 9,02         |
| LZKSC500H100N | 500          | 221252           | 2               | 10,13        |
| LZKSC600H100N | 600          | 221262           | 2               | 11,27        |