

KKZMC...H50 45° Horizontal Bend

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

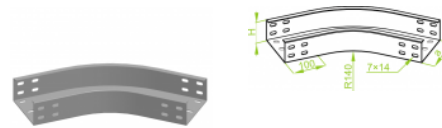

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKZMC50H50	50	350905	20	0,95
KKZMC100H50	100	350910	10	1,66
KKZMC200H50	200	350920	10	2,19
KKZMC300H50	300	350930	4	3,22
KKZMC400H50	400	350940	4	4,43
KKZMC500H50	500	350950	2	5,81
KKZMC600H50	600	350960	2	7,37

Connected products:

