

LZZMP...H50 45° Vertical Bend - External

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

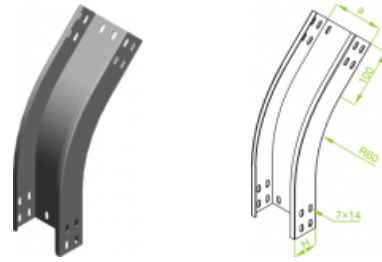

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZZMP50H50	50	351605	20	0,73
LZZMP100H50	100	351610	10	0,85
LZZMP200H50	200	351620	10	1,19
LZZMP300H50	300	351630	4	1,54
LZZMP400H50	400	351640	2	1,89
LZZMP500H50	500	351650	2	2,25
LZZMP600H50	600	351660	2	2,60

Connected products:

