

LCC...H100 U-Shaped Connector

Overview:

APPLICATION

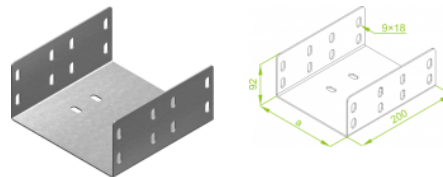
Connecting elements of cable runs

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:
E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For the installation use 20 sets of Screw SGF M8×14


Versions:

 Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LCC100H100	95	310510	10	0,96
LCC200H100	195	310520	10	1,28
LCC300H100	295	310530	4	1,60
LCC400H100	395	310540	4	1,92
LCC500H100	495	310550	2	2,24
LCC600H100	595	310560	2	2,56

Connected products:


 KZWC...H100
Reinforced
Cable Tray

 KZLC...H100
Cable Tray with
Integral
Connector

 LZCH100
Straight
Connector

 LZGCH100
Articulated
Connector

 KKZC...H100 90°
Horizontal Bend

 KKZMC...H100
45° Horizontal
Bend

 TKZC...H100
Horizontal Tee

 CZKZC...H100
Horizontal
Cross-over

 LZZC...H100 90°
Vertical Bend -
External

 LZZMC...H100
45° Vertical
Bend - External

 LZW...H100 90°
Vertical
Bend - Internal

 LZWMC...H100
45° Vertical
Bend - Internal

 TRZC...H100
Vertical Tee -
Lengthwise

 RKZC...H100
Straight
Reducer