


KZC...H200 Cable Tray

Overview:

APPLICATION

Cable routing



Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


To join 2 cable tray lengths firmly use either 1 pair of Straight Connector LZCH200 or 1pc of U-Shaped Connector LCC...H200 and 26 sets of Screw SGF M8x14.

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KZC200H200/3	3000	200	370420	2	10,21	39800
KZC300H200/3	3000	300	370430	2	11,04	59800
KZC400H200/3	3000	400	370440	2	13,51	79800
KZC500H200/3	3000	500	370450	2	15,16	99800
KZC600H200/3	3000	600	370460	2	16,80	119800

Connected products:

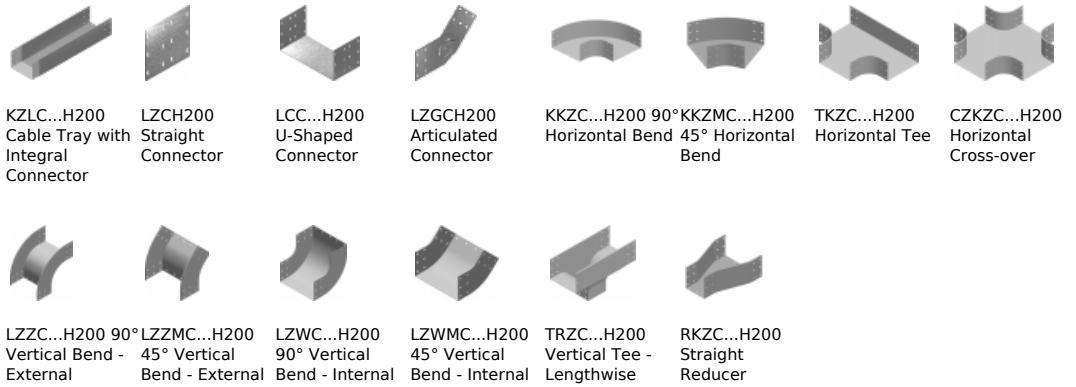

KZLC...H200
Cable Tray with
Integral
Connector

LZCH200
Straight
Connector

LCC...H200
U-Shaped
Connector

LZGCH200
Articulated
Connector

KKZC...H200 90° Horizontal Bend
KKZMC...H200 45° Horizontal Bend

TKZC...H200
Horizontal Tee

CZKZC...H200
Horizontal
Cross-over

LZCC...H200 90° Vertical Bend - External

LZZMC...H200 45° Vertical Bend - External

LZWC...H200 90° Vertical Bend - Internal

LZWMC...H200 45° Vertical Bend - Internal

TRZC...H200
Vertical Tee -
Lengthwise

RKZC...H200
Straight
Reducer