

KKMPJ...H30 45° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

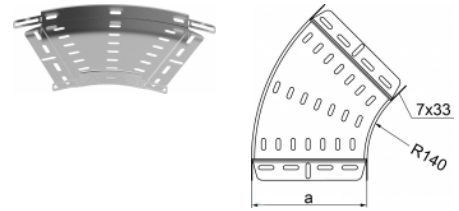

For installation use Screw Sets **SGK M6×10** or **SG M6×10**.

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| KKMPJ50H30 | 50 | 130614 | 20 | 0,15 |
| KKMPJ100H30 | 100 | 130714 | 20 | 0,25 |
| KKMPJ150H30 | 150 | 130814 | 10 | 0,36 |
| KKMPJ200H30 | 200 | 130914 | 10 | 0,48 |
| KKMPJ300H30 | 300 | 131014 | 10 | 0,78 |

Connected products:



KGJ...H30 Cable Tray



KGR...H30 Cable Tray



KGL...H30 Cable Tray



KBJ...H30 Cable Tray



KBR...H30 Cable Tray