

KKMPJ...H30 45° Horizontal Bend

Overview:

Application

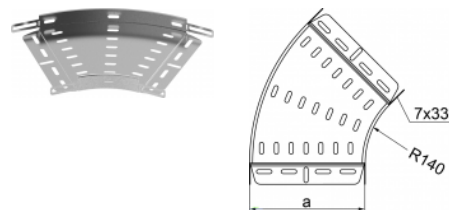
Diversions in cable routing.

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


For installation use Screw Sets SGK M6×10 or SG M6×10.

Versions:

 Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMPJ50H30	50	130614	20	0,15
KKMPJ100H30	100	130714	20	0,25
KKMPJ150H30	150	130814	10	0,36
KKMPJ200H30	200	130914	10	0,48
KKMPJ300H30	300	131014	10	0,78

Connected products:



KGJ...H30 Cable Tray KGR...H30 Cable Tray KGL...H30 Cable Tray KBJ...H30 Cable Tray KBR...H30 Cable Tray KBL...H30 Cable Tray