

LZZC...H200 90° Vertical Bend - External

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

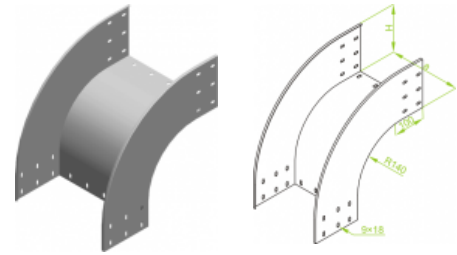

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------------|--------------|------------------|-----------------|--------------|
| LZZC200H200 | 200 | 371520 | 2 | 4,29 |
| LZZC300H200 | 300 | 371530 | 2 | 4,97 |
| LZZC400H200 | 400 | 371540 | 1 | 5,64 |
| LZZC500H200 | 500 | 371550 | 1 | 6,32 |
| LZZC600H200 | 600 | 371560 | 1 | 6,98 |

Connected products:

