

LDC...H45N 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

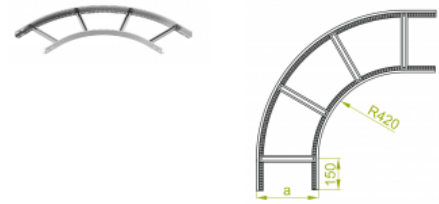

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDC100H45N	100	446910	2	3,39
LDC200H45N	200	446920	2	4,11
LDC300H45N	300	446930	2	4,83
LDC400H45N	400	446940	2	5,55
LDC500H45N	500	446950	2	6,27
LDC600H45N	600	446960	2	7,00