

## LPDWC...H45N 90° Vertical Bend - Internal

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

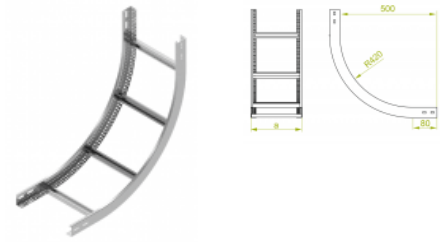

**NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section**

**FEATURES & BENEFITS**

- capability of manufacturing vertical bends of any internal radius adjusted to minimum bending angle
- high mechanical properties
- even distribution of cables
- alternative use of covers
- eye-pleasing appearance

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDWC100H45N	100	449310	1	1,94
LPDWC200H45N	200	449320	1	2,30
LPDWC300H45N	300	449330	1	2,70
LPDWC400H45N	400	449340	1	3,06
LPDWC500H45N	500	449350	1	3,46
LPDWC600H45N	600	449360	1	3,86