

## LDZC...H50N 90° Horizontal Bend - External

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


**Available to order:**

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section**

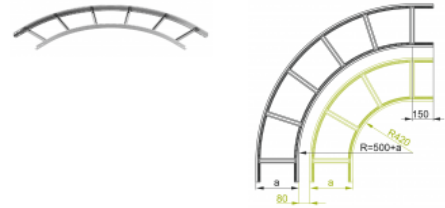

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>LDZC100H50N</b>	<b>100</b>	<b>457110</b>	<b>2</b>	<b>4,09</b>
<b>LDZC200H50N</b>	<b>200</b>	<b>457120</b>	<b>2</b>	<b>5,46</b>
<b>LDZC300H50N</b>	<b>300</b>	<b>457130</b>	<b>2</b>	<b>6,86</b>
<b>LDZC400H50N</b>	<b>400</b>	<b>457140</b>	<b>2</b>	<b>8,25</b>
<b>LDZC500H50N</b>	<b>500</b>	<b>457150</b>	<b>2</b>	<b>9,54</b>
<b>LDZC600H50N</b>	<b>600</b>	<b>457160</b>	<b>2</b>	<b>11,50</b>