

RDLC...H50N Left Reducer

Overview:

Application

Reducing/extending widths of cable runs

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

In case of special orders specify dimensions a, b
NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK -rung cross-section Cable Ladder DU - rung cross-section

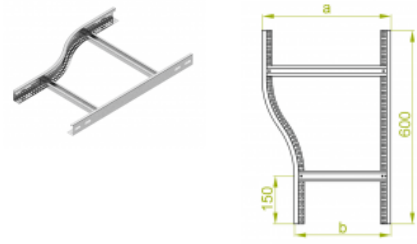

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. | Size b [mm] |
|------------------------|--------------|------------------|-----------------|--------------|-------------|
| RDLC200/100H50N | 200 | 458420 | 2 | 1,96 | 100 |
| RDLC300/200H50N | 300 | 458430 | 2 | 2,17 | 200 |
| RDLC400/300H50N | 400 | 458140 | 2 | 2,41 | 300 |
| RDLC500/400H50N | 500 | 458150 | 2 | 2,65 | 400 |
| RDLC600/500H50N | 600 | 458160 | 2 | 2,87 | 500 |