


DUC...H60N Cable Ladder

Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel sections to 3m long (SS)
L- powder coating in a full range of colours (PC)

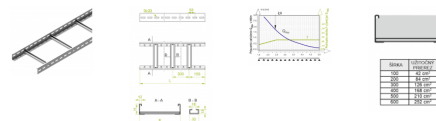

NOTE: Cable ladder with rungs adapted for use with Cable Clamps UK
Available upon special order:
- cable ladders 2m long
- cable ladders 150, 250mm wide
- production capability of perforated rungs

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
DUC100H60/3N	3000	100	466610	4	3,22	4200
DUC100H60/6N	6000	100	466710	2	3,22	4200
DUC200H60/3N	3000	200	466620	4	3,58	8400
DUC200H60/6N	6000	200	466720	2	3,58	8400
DUC300H60/3N	3000	300	466630	2	3,96	12600
DUC300H60/6N	6000	300	466730	2	3,96	12600
DUC400H60/3N	3000	400	466640	2	4,50	16800
DUC400H60/6N	6000	400	466740	2	4,50	16800
DUC500H60/3N	3000	500	466650	2	4,67	21000
DUC500H60/6N	6000	500	466750	2	4,67	21000
DUC600H60/3N	3000	600	466660	2	5,05	25200
DUC600H60/6N	6000	600	466760	2	5,05	25200

Connected products:

							
LDC/LDOCH60 Straight Connector	LKDC/LKDOCH6 0 Angle Connector	LDDCH60N Articulated Connector - Attachable	LDDTH60N Articulated Connector - Attachable	LGC/LGOCH60N Articulated Connector	LGTH60N Articulated Connector	LDC...H60N 90° Horizontal Bend	LDZC...H60N 90° Horizontal Bend - External
							
TDC...H60N Horizontal Tee	CZDC...H60N Horizontal Cross-over	LPDWC...H60N 90° Vertical Bend - Internal	LPDZC...H60N 90° Vertical Bend - External	LPDC...H60N Adjustable Vertical Bend	RDSC...H60N Straight Reducer	RDLC...H60N Left Reducer	RDPD...H60N Right Reducer