

LDP/LDOP...H60 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

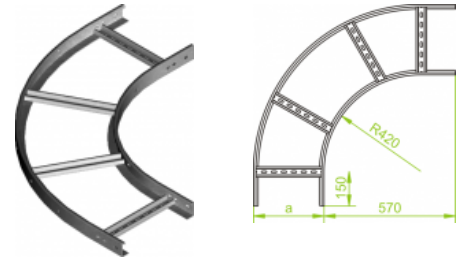

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDP/LDOP100H60	100	466810	2	2,79
LDP/LDOP200H60	200	466820	2	3,35
LDP/LDOP300H60	300	466830	2	3,91
LDP/LDOP400H60	400	466840	2	4,47
LDP/LDOP500H60	500	466850	2	5,03
LDP/LDOP600H60	600	466860	2	5,58