

LPDC...H80N Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

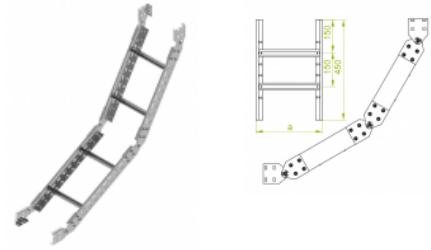

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDC100H80N	100	497110	2	7,02
LPDC200H80N	200	497120	2	7,53
LPDC300H80N	300	497130	2	8,05
LPDC400H80N	400	497140	2	8,82
LPDC500H80N	500	497150	2	9,07
LPDC600H80N	600	497160	2	9,60