


## Uličné osvetľovacie stĺpy šesťhranné rovné s prírubou



Technické parametre								
TYP	H	H <sub>1</sub>	Ød/D <sub>E</sub>	Z	L	m	S	a x a x h TYP
	m	m	mm	mm/m	mm	kg	m <sup>2</sup>	m
S-60P	6,0	0,5	48; 60/145	14,2	100	40	2,4	0,3 x 0,3 x 1,0
S-70P	7,0			12,15		49	2,5	F100/200
S-80P	8,0		48; 60/177	13,8		67	3,2	0,3 x 0,3 x 1,5 F150/200
S-90P	9,0			12,2		74	3,6	
S-100P/6	10,0			11,6		78	4,0	

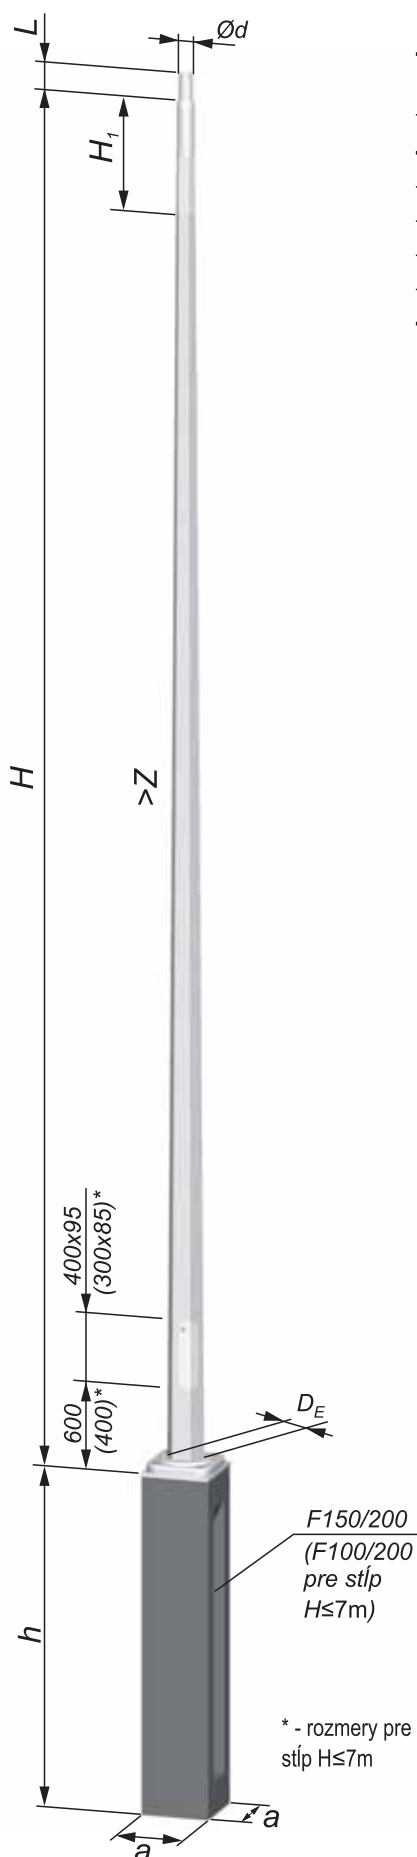

Pevnostné parametre					
TYP	Hmotnosť svietidiel	Veterné oblasti podľa STN EN 1991-1-4:2008			M <sub>F</sub>
		Prípustná plocha svietidiel [m <sup>2</sup> ]			
	kg	I	II	III	kNm
S-60P	50	0,61	0,41	0,28	7,0
S-70P	50	0,55	0,32	0,16	7,0
S-80P	50	1,02	0,68	0,48	15
S-90P	50	0,48	0,20	0,05	15
S-100P/6	50	0,79	0,48	0,29	18

\* - rozmery pre  
stĺp H≤7m