


## Uličné osvetľovacie stĺpy šesťhranné výložníkové s prírubou - výložník „St“



\* - rozmery sa týkajú stĺpa H≤7m

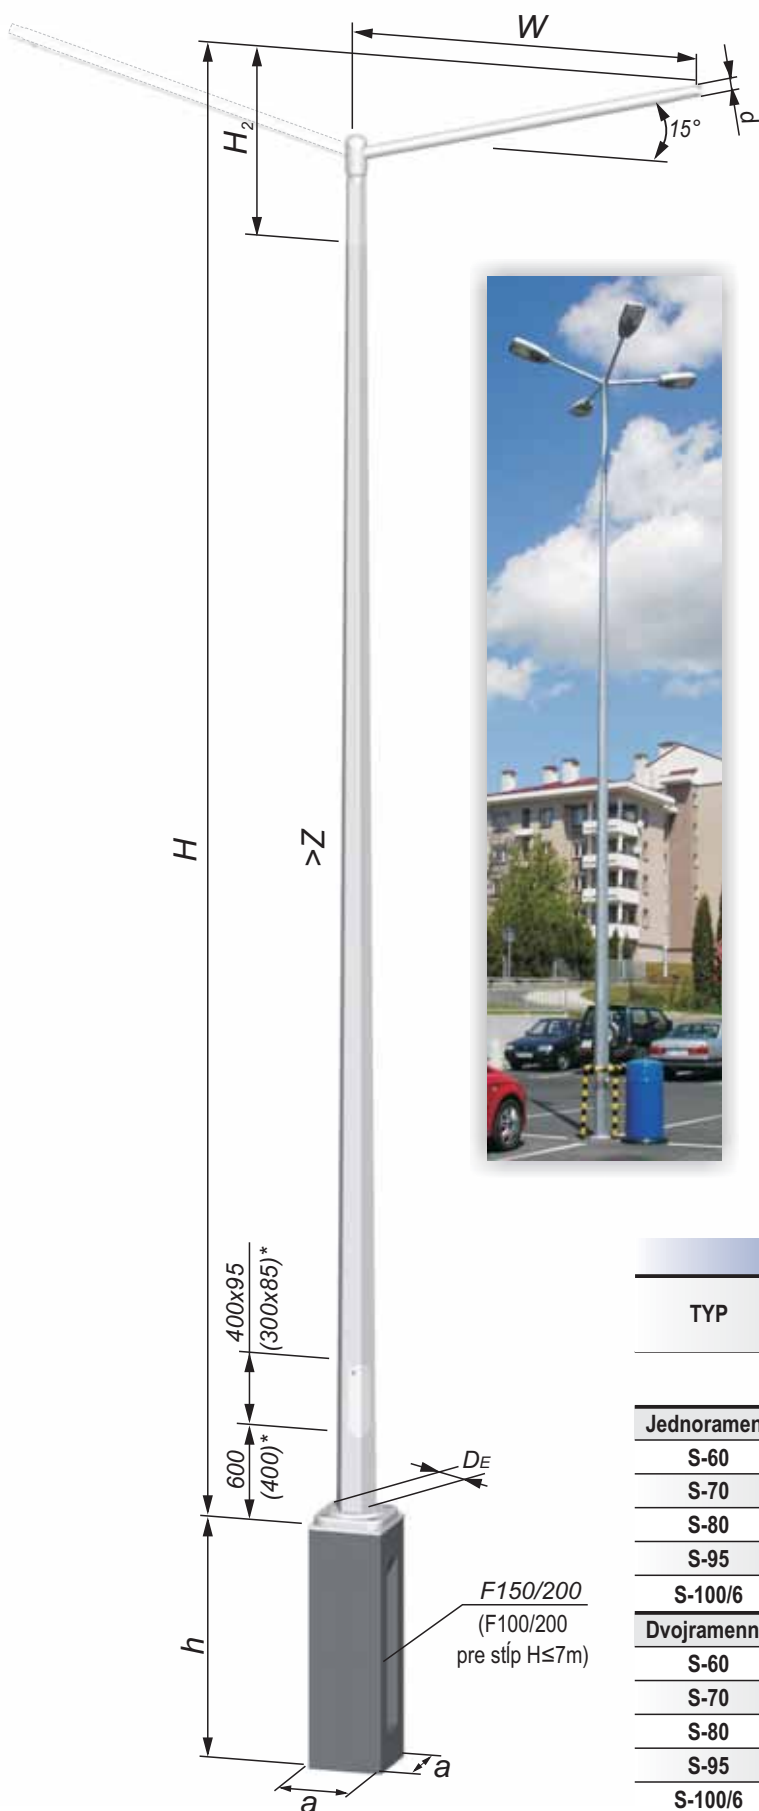

Technické parametre								
TYP	W	H	H <sub>2</sub>	d/D <sub>E</sub>	Z	m**	S**	a x a x h TYP
	m	m	m	mm	mm/m	kg	m <sup>2</sup>	m
S-60	1,0			48; 60/145		42	2,5	0,3 x 0,3 x 1,0 F100/200
	1,5	6			14,8	43	2,7	
	2,0					45	2,9	
S-70	1,0					54	2,7	
	1,5	7			12,15	56	2,8	
	2,0					58	2,9	
S-80	1,0		0,75	48; 60/177		72	3,5	0,3 x 0,3 x 1,5 F150/200
	1,5	8			13,8	73	3,6	
	2,0					75	3,7	
S-95	1,0					79	3,9	
	1,5	9,5			12,2	80	4,0	
	2,0					82	4,1	
S-100/6	1,0					83	4,4	
	1,5	10			11,6	84	4,5	

OCEĽ



Pevnostné parametre						
TYP	W	Hmotn. svietidiel	Veterané oblasti podľa STN EN 1991-1-4:2008			M <sub>F</sub>
			Prípustná plocha svietidiel [m <sup>2</sup> ]			
	m	kg	I	II	III	kNm
<b>Jednoramenný výložník</b>						
S-60	1,5	15	0,52	0,31	0,18	7
S-70	1,5	15	0,48	0,25	0,15	7
S-80	1,5	15	1,0	0,6	0,4	15
S-95	1,5	15	0,65	0,38	0,21	15
S-100/6	1,5	15	0,8	0,5	0,3	18
<b>Dvojranný výložník</b>						
S-60	1,5	15	0,42	0,21	0,1	7
S-70	1,5	15	0,38	0,14	0,1	7
S-80	1,5	15	0,9	0,5	0,3	15
S-95	1,5	15	0,55	0,28	0,11	15
S-100/6	1,5	15	0,7	0,4	0,2	18

\*\* - Parametre pre jednoramenné výložníky.